

## Data Sheet

# End Grain Mosaic




Like block flooring, end grain mosaic consists of small, square blocks that are cut against the grain.

This results in an extremely durable floor, particularly recommended for spaces subject to heavy loads.

Upon delivery the block mosaic has already been laid in cube patterns, glued onto a mesh. This makes for simple, effective fitting.

# End Grain Mosaic – Data Sheet

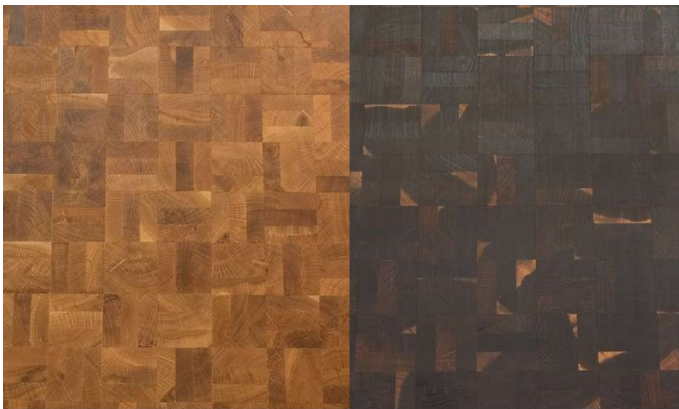

Oak

Smoked oak

Just as our end grain flooring, HØRNING End grain mosaic is made of small solid square blocks, which are cut opposite the annual year rings.

## Dimensions

Thickness: 10 / 18 mm  
 Width: 23 mm  
 Length: 69 mm  
 140x558 mm on net.

## Wood species

Oak, smoked oak.

## Patterns

Square pattern on net.

## Surface

Untreated.

## Grading

### Object

A vibrant, natural interplay of colours with consistent variations. Chips and small, healthy knots are acceptable. In principle, it is free from surface scratches and ingrown bark. Gradings vary, depending on type of wood. Wood is a wonderful natural material, so variation vis-à-vis descriptions and photos will always occur. Any samples show only dimension and texture and cannot show the grading. Variations will certainly occur between small samples and actual deliveries for large areas.

## Under-floor heating

Under-floor heating may be used with end grain mosaic floors. Please see the installation guide.

## Indoor climate

It is important that the surface temperature never exceeds 27 degrees!

The relative humidity in the air (R.H.) must always be between 35-65% before, during and after installation.

**Always study the installation guide from HØRNING prior to installation.**

## Environment

FSC-certified wood is delivered on request.

HØRNING cares about the environment and sustainable forestry.

Naturally HØRNING is FSC-certified



## CE-certification

HØRNING floors are generally CE certified in accordance with the EC declaration regarding wooden floors for indoor usage EN 14342.