

Data Sheet

Solid Parquet Block

Our extremely exclusive floors produced in Denmark



Endless possibilities and the markets smallest tolerances.

Short blocks, long blocks and pattern blocks in a variety of woods give you - and us - the opportunity to put together a very unique floor.

No matter what, we guarantee precision craft, high quality and outstanding finish.

Contact us if you would like special processing in addition to the types of wood, dimensions and delivery as shown below.

Solid Parquet Block (DK) - Data Sheet

Small strips

To be installed in downward sequence on a firm base. Dimensions: Thickness 15 or 20 mm x width 65.5 mm x length 300-600 mm, downward lengths.

Long strips

To be installed in downward sequence or on a firm base. Dimensions: Thickness 20 mm x width 63 mm x length 800-1,200 mm, downward lengths.

Pattern strips

To be installed on a firm base. Dimensions: Thickness 15 or 20 mm x width 65.5 mm x length 327.5/393/458.5 mm. Please request any custom-made measurements and ranges.

Surface: Untreated.

Profile: Available with tongue/groove and sharp edges. Pattern strips are available as both left and right strips in equal numbers

Wood species and gradings:

Species	Grading		
	Select	Nature	Rustic
Ash	X	X	X
Bilinga		X	
Beech		X	
Doussie		X	
Oak	X	X	X
Jatoba		X	
Merbau		X	
Smoked oak		X	
Teak		X	
Walnut		X	
Wengé		X	

Grades

Grades vary from wood specie and dimension. Wood is a natural material, thus there will always be variations compared to descriptions and photos. Samples will only show dimension and construction and not the grade. It is certain that variations will exist between small samples and the actual deliveries.

Select/Exquisit

General uniform colour and wood structure. Variations due to growth conditions will exist. In principle free of knots and sapwood. Whirls, small scratches, cross grains and brown heart may be found to a small extent.


Nature/Living

A more characteristic look with natural colours and wood structure. In principle free of open knots, cracks, pith etc. Whirls, healthy knots, small scratches, cross grains and silicon stains may be found. Sapwood or brownheart will be found depending of the wood specie.

Rustic/Country

A very characteristic look with all natural colour variations and structures. Knots, sapwood and brownheart is found. Very small open knots and scratches may be found.

Patterns:

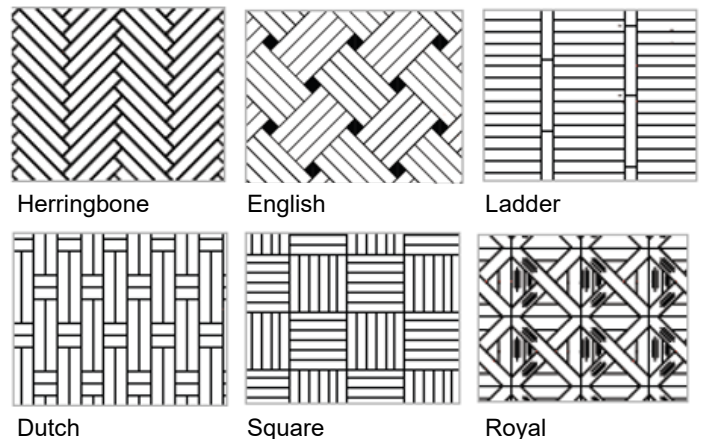

Production tolerances

In order to ensure the highest quality, we have very strict production tolerances for our parquet floors:

Thickness: +/- 0.1 mm

Width: +/- 0.1 mm

Length: +/- 0.1 mm

Perpendicular: +/- 0.05 mm

Moisture content in the wood: 8% (+/- 2%)

Under-floor heating

Under-floor heating may be used – please see our installation guide.

Indoor climate

It is important that the surface temperature never exceeds 27 degrees!

The relative humidity in the air (R.H.) must always be between 35-65% before, during and after installation.

Always study the installation guide from HØRNING prior to installation.

Environment

FSC® certified wood is delivered on request.

HØRNING cares about the environment and sustainable forestry.

Naturally HØRNING is FSC-certified.



CE-certification

HØRNING floors are generally CE certified in accordance with the EC declaration regarding wooden floors for indoor usage EN 14342.